

MTC-2302, MTC-2301

FEATURES



MTC-2302



MTC-2301




MTC-2302

- ◆ 1/3" Hi-Res. B/W CCD Camera
- ◆ 600TVL/ 0.05Lux@F1.0
- ◆ AES/AGC/BLC/FL (ON/OFF)
- ◆ Video/DC IRIS Control

MTC-2301

- ◆ 1/3" Med-Res. B/W CCD Camera
- ◆ 450TVL/ 0.05Lux@F1.0
- ◆ AES/AGC/BLC/FL (ON/OFF)
- ◆ Video/DC IRIS Control

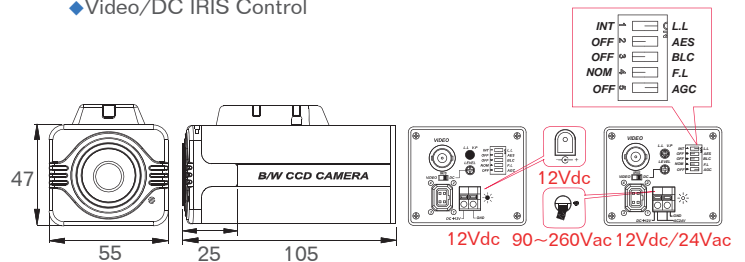

Tol: ±0.5 Unit:mm

SPECIFICATIONS

	MTC-2302		MTC-2301	
	CCIR	EIA	CCIR	EIA
TV System	CCIR	EIA	CCIR	EIA
Image Sensor	1/3" Sony Super HAD CCD			
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)	537(H)x597(V)	537(H)x505(V)
Resolution	600TVL		450TVL	
Minimum Illumination	0.05Lux@F1.0			
Video Output ; Connector	1.0Vp-p Composite, 75Ω ; BNC			
Signal to Noise Ratio	More than 48dB (AGC off)			
Gamma Correction	0.45			
Synchronizing System	Internal			
Automatic Electronic Shutter	ON:1/50(60)sec.~1/100,000sec. / OFF:1/50(60)sec.			
Automatic Gain Control	ON / OFF			
Automatic White Balance	NA			
Back Light Compensation	ON / OFF			
Flickerless	ON / OFF			
DNR ; Sense Up	NA			
Digital Day&Night Mode	NA			
Automatic IRIS ; Connector	VIDEO / DC ; D4 IRIS Jack			
Adjustment VR	DC Level			
Lens Mount	C / CS mount (With Adaptor)			
Lens, Angle of View(H)	Lens Option: Please See the Page of Lens Series			
Power Supply ; Consumption	12Vdc, 12Vdc/24Vac, 90~260Vac ; 1.5W		12Vdc, 12Vdc/24Vac, 90~260Vac ; 1.2W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C			
Operation ; Storage Humidity	Maximum:RH80% ; RH90%			
Dimensions	55(W)x47(H)x105(D)mm			
Net Weight	12Vdc:250g, 12Vdc/24Vac:350g, 90~260Vac:350g			
Accessories Series Option(Page)	Lens:SHV-3514DAI, SHV-0614DAI(G-7) ; Bracket:MTB-101, MTB-102(G-3) ; Housing(G-4)			