


Color Box Camera (HQ1)

Products List > A Series > Camera > Color Box Camera (HQ1) > MTC-8362HQDN

MTC-8362HQDN


FEATURES

MTC-8362HQDN

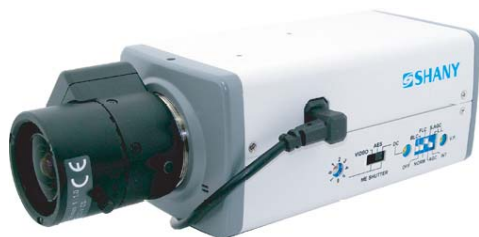

MTC-8362HQDN

- ◆ 1/3" Super Hi-Res. Color Camera
- ◆ SONY HQ1/ 540TVL/ 0.15Lux@F1.0
- ◆ Line Lock
- ◆ 8 Steps Manual Shutter
- ◆ AES/AGC/BLC/Digital Day&Night (ON/OFF)
- ◆ Dynamic Digital Noise Reduction (DNR) & Sense Up
- ◆ Video/DC IRIS Control
- ◆ 12Vdc/24Vac; 90~260Vac

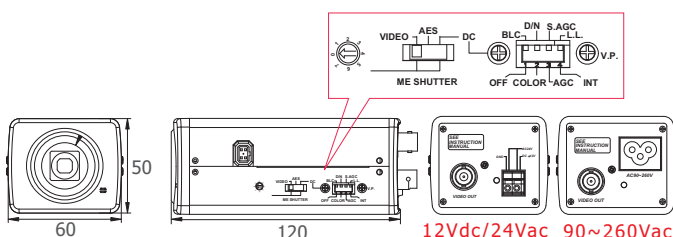

Tol:±0.5 Unit:mm

SPECIFICATIONS

MTC-8362HQDN		
	PAL	NTSC
TV System	PAL	NTSC
Image Sensor	1/3" SONY Super HAD CCD	
Number of Total Pixels	795(H)x596(V)	811(H)x508(V)
Resolution ; DSP	540TVL ; SONY HQ1	
Minimum Illumination	0.15Lux@F1.0	
Video Output ; Connector	1.0Vp-p Composite, 75Ω ; BNC	
Signal to Noise Ratio	More than 50dB (SUPER AGC off)	
Gamma Correction	0.45	
Synchronizing System	INTERNAL / LINE LOCK (AC Version Only)	
Automatic Electronic Shutter	AES:1/50(60)sec.~1/100,000sec. 0:1/50(60)sec. 1:FL 1/120(100)sec. 2:1/250sec. 3:1/500sec. 4:1/1000sec. 5:1/2000sec. 6:1/4000sec. 7:1/10000sec.	
Automatic Gain Control	AGC / SUPER AGC	
Automatic White Balance	Automatic	
Back Light Compensation	ON / OFF	
Flickerless	NA	
DNR ; Sense Up	Automatic Dynamic Digital Noise Reduction (DNR) ; Automatic	
Digital Day&Night Mode	COLOR / D&N (B/W Mode<2Lux, Color Mode>5Lux)	
Automatic IRIS ; Connector	VIDEO / DC ; D4 IRIS Jack	
Adjustment VR	DC Level, L.L V-phase	
Lens Mount	C / CS mount (With Adaptor)	
Lens, Angle of View(H)	Lens Option: Please See the Page of Lens Series	
Power Supply ; Consumption	12Vdc/24Vac:3.0W(250mA) ; 90~260Vac:4.5W	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity	Maximum:RH80% ; RH90%	
Dimensions	60(W)x50(H)x120(D)mm	
Net Weight	12Vdc/24Vac:400g ; 90~260Vac:550g	
Accessories Series Option(Page)	Lens:SHV-IR7550DAI(G-6), SHV-0514DAI(G-6) ; Bracket:MTB-101, MTB-102(G-3) ; Housing(G-4)	

08V31