

Color Box Camera

Products List > D Series > Camera > Color Box Camera > MTC-8382HDN

MTC-8382HDN


FEATURES

MTC-8382HDN



MTC-8382HDN

- ◆ 1/3" Hi-Res. Color Camera
- ◆ 540TVL, 0.08Lux@F1.0
- ◆ Mechanical Focus Adjustment
- ◆ AES / AGC / BLC / Digital Day&Night (ON/OFF)
- ◆ Video/DC IRIS Control
- ◆ Line Lock
- ◆ Built-in Dynamic Digital Noise Reduction (DNR)
- ◆ Sense Up Function Supported

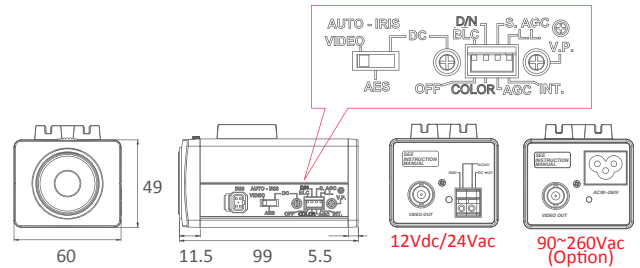

Tol:±0.5 Unit:mm

SPECIFICATIONS

| MTC-8382HDN | | |
|------------------------------|---|---------------|
| TV System | PAL | NTSC |
| Image Sensor | 1/3" Sony Super HAD CCD II | |
| Number of Total Pixels | 795(H)x596(V) | 811(H)x508(V) |
| Resolution | 540TVL | |
| Minimum Illumination | 0.08Lux@F1.0 | |
| Video Output ; Connector | 1.0Vp-p Composite, 75Ω (BNC) | |
| Signal to Noise Ratio | More than 50dB (SUPER AGC off) | |
| Gamma Correction | 0.45 | |
| Synchronizing System | INTERNAL / LINE LOCK (AC Version Only) | |
| Automatic Electronic Shutter | ON:1/50(60)~1/100,000 sec. / OFF:1/50(60) sec. | |
| Automatic Gain Control | AGC / SUPER AGC | |
| Automatic White Balance | Automatic | |
| Back Light Compensation | ON / OFF | |
| Flickerless | NA | |
| DNR ; Sense Up | Auto Dynamic Digital Noise Reduction (DNR) ; Automatic | |
| Digital Day&Night Mode | COLOR / D&N (B/W Mode<2Lux, Color Mode>5Lux) | |
| Automatic IRIS ; Connector | VIDEO / DC ; D4 IRIS Jack | |
| Adjustment VR | DC Level, L.L V-phase | |
| Lens Mount | C / CS mount (With Adaptor) | |
| Lens, Angle of View(H) | Lens Option: Please See the Page of Lens Series | |
| Power Supply ; Consumption | 12Vdc/24Vac (10.8~39Vdc/24Vac) ; 3.0W , Option:90~260Vac ; 4.5W | |
| Operation ; Storage Temp. | -10°C~50°C ; -20°C~60°C | |
| Operation ; Storage Humidity | Maximum: RH80% ; RH90% | |
| Dimensions | 60(W)x49(H)x99(D)mm | |
| Net Weight | 12Vdc/24Vac:250g ; 90~260Vac:300g | |
| Accessories Option (Page) | Lens(I-6~8) ; Bracket:MTB-101, MTB-102(I-4) ; Housing(I-5) | |