

36x D/N Car License Plate Zoom Camera

Products List > B Series > Camera > 36x D/N Car License Plate Zoom Camera > MZC-EX1000A

MZC-EX1000A

MZC-EX1000A



FEATURES

Mechanical IR Cut Filter (ICR)




Option:



MZC-EX1000A new

- ◆ 36x D/N Car License Plate Zoom Camera
- ◆ 1/4" Sony Exview HAD CCD
- ◆ Sony HQ1 DSP, Color: 540TVL; B&W: 560TVL
- ◆ 0.7Lux@F1.6 (30IRE)
- ◆ Multi-language OSD Setting Menu
- ◆ RS485 Interface OSD Control by Pelco-D, Pelco P
- ◆ 36x Optical Manual/ Auto Focus/ Auto IRIS Zoom Lens
- ◆ D/N: Auto/Ext./Schedule Input Control Mechanical IR Cut Filter (ICR)
- ◆ Shutter Mode (SCHEDULE / DAY&NIGHT)
- ◆ Manual Shutter: 16 Steps
- ◆ Privacy Zone Mask
- ◆ With Year/Month/Date and Timer Clock

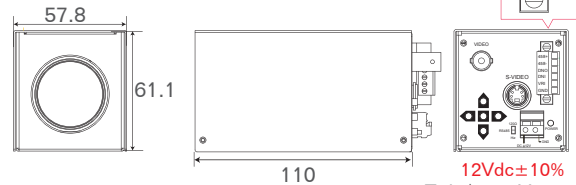

SPECIFICATIONS

	MZC-EX1000A	
	PAL	NTSC
TV System	PAL	NTSC
Image Sensor	1/4" Sony Exview HAD CCD	
Number of Total Pixels	470,000 Pixels	410,000 Pixels
Resolution ; DSP	Color: 540TVL, B/W: 560TVL ; SONY HQ1	
Minimum Illumination	Color: 0.7Lux@F1.6 (30IRE) ; B&W: 0.1Lux@F1.6 (30IRE)	
Video Output ; Connector	1.0Vp-p Composite, 75Ω; S-Video Y/C	
Signal to Noise Ratio	More than 50dB	
Mechanical IR Cut Filter (ICR)	IR cut filter removable, Lux level adjustable, 12 steps	
Synchronizing System	INTERNAL / EXTERNAL (V-Lock)	
Day & Night Mode	COLOR / B&W / AUTO / EXT / SCHEDULE	
Electronic Shutter	AUTO(1/50(60)sec.~1/100,000sec.) / FIX(16 Steps) / SCHEDULE or DAY&NIGHT Manual Shutter: 0:1/100(120)sec. 1:1/190sec. 2:1/350sec. 3:1/610sec. 4:1/1120sec. 5:1/2000sec. 6:1/3240sec. 7:1/4000sec.	
White Balance	ATW / AUTO / ONE PUSH / MANUAL / INDOOR /OUTDOOR	
Back Light Compensation	ON (6 Areas) / OFF	
Flickerless	ON / OFF	
Auto Gain Control	AUTO / MANUAL (-3 to 28dB, Adjustable)	
Language	ENGLISH / TRADITIONAL CHINESE / SIMPLIFIED CHINESE / JAPANESE	
Picture Effects	NEGATIVE/ MIRROR/ BLACK&WHITE	
Privacy Zone Mask	ON / OFF (8 Zones)	
Camera Control Interface	RS485 Interface OSD Control by Pelco-D, Pelco P	
Timer Clock	Year/Month/Date, Hour/Minute/Second	
Focusing System	Real Time AF/ One Push AF/ Manual / Infrared Compensation	
Infrared Lens Focus Compensation	Yes	
Minimum Working Distance	35mm(Wide end) to 1,500mm(Tele end)	
Angle of View	H: 57.8°(Wide) ~1.7°(Tele) / V: 43.7°(Wide) ~1.3°(Tele)	
Lens	36x Optical Zoom f3.4mm(Wide)~122.4mm(Tele), F1.6 to F4.5	
Power Supply ; Consumption	12Vdc ± 10% ; 4.5W (Motor Inactive), 5.8W (Motor Active)	
Operation ; Storage Temp.	-10°C~50°C ; -20°C~60°C	
Operation ; Storage Humidity	Maximum: RH80% ; RH90%	
Dimensions	57.8(W)x61.6(H)x110(L)mm	
Net Weight	230g	
Accessories Series Option(Page)	N/A	

Camera